BT. 02.34 Q5/E

S E R I E S


Process controller with PROFIBUS DP and Modbus Master/Slave 1/4 DIN - 96 x 96 mm gamma**due**® series Q5 line


Sophisticated multifunction process controller with high level communications


By its three different kinds of serial communications:
- PROFIBUS DP Slave
- Modbus Master
- Modbus Slave,

the gamma**due**® Q5 line can interface, on different levels, with other devices, by exchanging informations, after processing them by mathematical package. The frequency input, added to the traditional inputs, two retransmission or control analogue outputs and four programs allow you to use it for the most diversified control strategies.



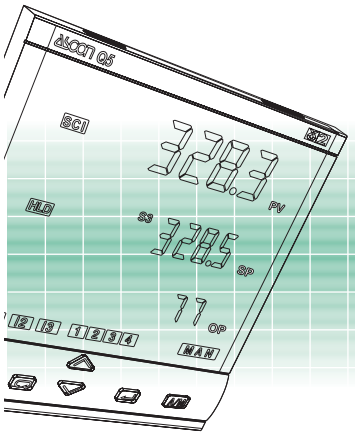





E

ISO 9001 Certified

Tuning


Two methods of tuning are available:
- one shot **initial Fuzzy-Tuning**
- self-teaching **continuous Adaptive-Tuning**

Fuzzy-Tuning


Two methods of initial tuning are available:
- **Auto-Tuning "one shot"**
- **Natural frequency "one shot"**

The **Fuzzy-Tuning** automatically selects one of the two methods which assure the best result for each condition.

The **Auto-Tuning** method works best on the step response basis.
When activated, if a deviation exists between the Setpoint and process variable larger than 5% of scale range, the controller modifies the output value. Then, in a short time, it calculates the PID parameters and the new algorithm is operational immediately .
The main advantages of this method are fast calculation and quick implementation.




The **Natural frequency** method works best when the process variable is very near to the Setpoint. When activated, it causes a process oscillation around the Setpoint value.
The main advantage of this method is a reduced disturbance to the process.



Adaptive-Tuning

It is self-teaching and waits for process change to recalculate the new PID parameters.
The new PID calculation does not influence the control output, avoiding any disturbance.
The PID optimisation is done only when necessary (e.g. Setpoint changes or process disturbances like load changes).
No action by the operator is required.
The operating mode of Adaptive-Tuning is safe and user friendly. It tests the process response after a disturbance, it memorises the intensity and frequency of the reaction, then the Adaptive-Tuning checks the new information with its statistical data base.
The correct PID algorithm is then ready to implement.
This tuning is ideal for non-linear processes where the PID parameters must be adapted to changing conditions.



Integrity in data copy

Configuration software

A **software** tool is available to improve both the **configuration and the parameterization**.
All the data can be stored to file. It is also possible to down-load the linearisation of the "custom" input by using the polynomial's coefficients and to configure the PROFIBUS DP profile file.


Memory chip

The **memory chip** makes possible a fast and safe transfer of data related to the configuration and all parameters.
With a simple operation, the information can be stored and copied to the **memory chip**.
The procedure can be protected by a password.




Setpoint programmer

Up to 4 profiles with 16 segments can be programmed.
Number of cycles as well as the max. allowed deviation can be configured.
The time base can be selected from seconds, minutes and hours. Run, Hold and Stop functions can be performed by means the front keypad, by external commands or by serial communications.

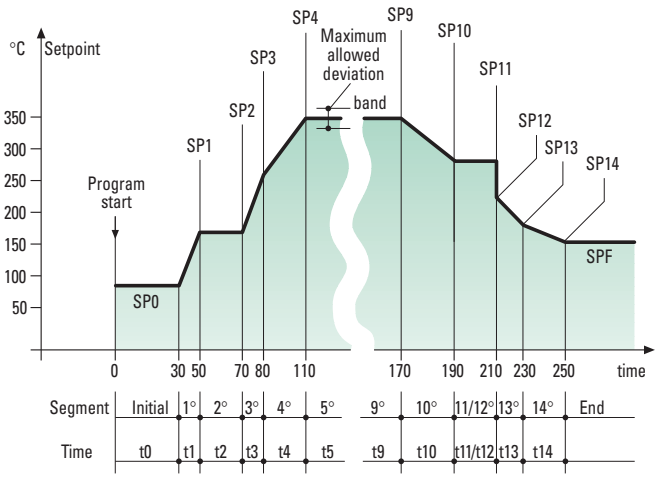

Fast view

The **Fast view** is a password protected review procedure of the 10 most useful parameters.
The combination of a luminous and comprehensive display and the ergonomic keypad allows the **immediate access** to the **Fast view**.

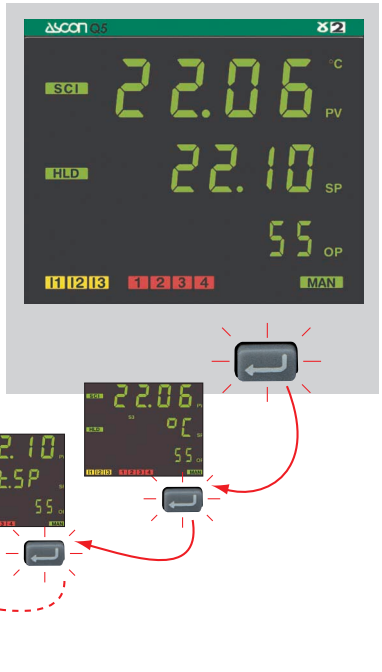

PROFIBUS DP Slave

Industrial standard for peripheral devices connection to a machine in a plant.

The protocol installed in this controller, offers the following advantages against the standard normally supplied by other suppliers:

- Communications baudrate **Up to 12 Mb/s with electric isolation**
- The list of data transfer (profile file) is **user configurable**. It can be set by means the gamma**due**® configuration software.


PROFI PROCESS FIELD BUS

Modbus Master

Modbus serial communications allows a controller to exchange informations with other devices, gamma**due**® series or others with Modbus Slave serial communications (PLC).
For instance it is possible to read the acquired value from a gamma**due**® C1 indicator with alarms and send this value as remote Setpoint to a gamma**due**® X3 controller; or the gamma**due**® Q5 controller can send the Setpoint profile of the running program to many X1 or Q1 controllers without Setpoint programmer function.
An Q5 controller can realize a simple network for the low level data management.
The Q5 can also reduce the work of the SCADA and grant the exchange of data in case of its failure.

Mathematical package

The **mathematical package** is able to process any information there is in the controller by using a simple set of mathematical operations.
For instance it can compare two values by selecting higher or lower, to do the sum or the ratio and so on.
Together with Modbus Master, it becomes a very powerful information handler;

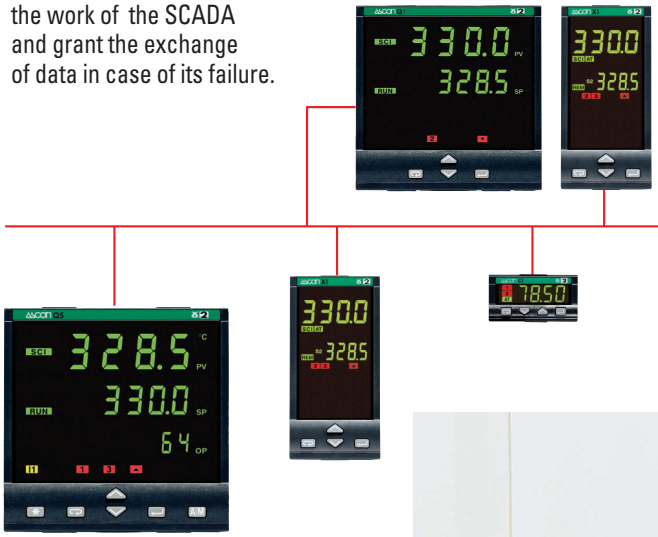

it can, for example, send to different controllers the same Setpoint profile with different values for every controller.



AutoLink

Self-configuring supervision software. Major features include monitoring and control of the connected devices, the visualisation by means of instrument faceplates, trend and mimic pages, data archiving as well as report generation. A self-configuring tool automatically polls the connected devices and build up the application software, reducing the start-up costs.




gammadue®

the right solution to your needs

Your needs	Our solutions
High speed data acquisition and signal management	Sampling time: 100 ms measure update time: 50 ms
Use of differents actuators	Two analogue outputs, heat/cool (linear, water, oil), valve control output with potentiometer position feedback
Process with time variable characteristic	Two initial and one continuous calculations of the right control parameters
Alarm signalling and diagnostic	Absolute, band and deviation alarm, Latching/Blocking, loop break alarm
Interfacing with other devices	Serial communications at 19,200 baud Modbus/Jbus Master and Slave, PROFIBUS DP at 12 Mbaud, two retransmission outputs, Remote Setpoint input, three digital inputs
Temperature profile	4 program with 16 segments, 3 stored Setpoints
Safe and reproducible configuration and parameter settings	Memory chip for data transfer and storing, configuration and parameterisation software
Environmental protection	IP65 front panel protection (indoor, dust and water protection)
Noise immunity	Electromagnetic compatibility
Universal input signals, linear as well as non-linear	Configurable input (TC, RTD, mA, Volt and ΔT, infrared sensor, "custom" linearisation, frequency input up to 20 kHZ)
Reliability and safety	CE compatibility, ASCON is ISO 9001 certified, 3 years warranty
Technical support	Technical application assistance from ASCON sales and after sales service

Resources

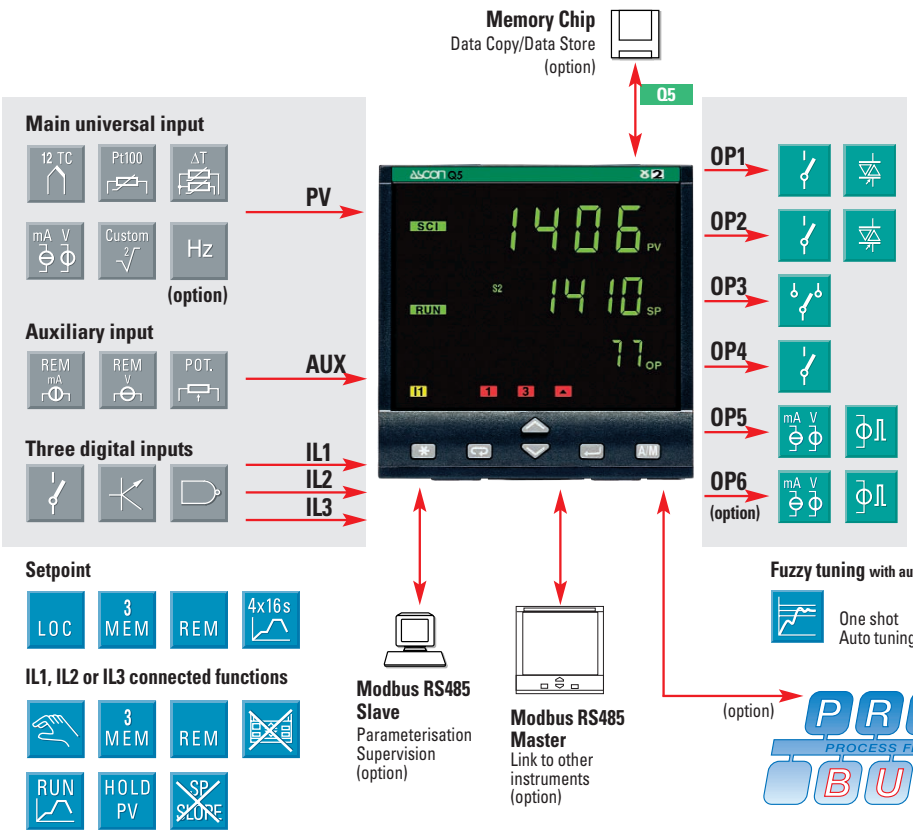

Operating mode

		Control		Alarms				Retransmission	
								PV/SP	
1	Singol action	OP1			OP2	OP3	OP4	OP5	OP6
2	Singol action	OP5		OP1	OP2	OP3	OP4		OP6
3	Double action	OP1	OP2			OP3	OP4	OP5	OP6
4	Double action	OP1	OP5		OP2	OP3	OP4		OP6
5	Double action	OP5	OP2	OP1		OP3	OP4		OP6
6	Double action	OP5	OP6	OP1	OP2	OP3	OP4		
7	Valve	OP1	OP2			OP3	OP4	OP5	OP6

Fuzzy tuning with automatic selection

One shot Auto tuning

One shot Natural Frequency

Continuous tuning

Adaptive

Technical data

Features (at 25°C T. env.amb.)	Description			
Total configurability	From keypad or serial communication the user selects: - the type of input - the type of Setpoint - the type of control algorithm - the type of output - the type and functionality of the alarms - control parameter values - access levels			
PV input (for signal ranges see table 1)	Common characteristics	A/D converter with resolution of 160.000 points Update measurement time: 50 ms Sampling time (max. update time of the output adjustable): 0.1…10.0 s. Configurable - Input shift: - 60…+ 60 digit Input filter with enable/disable: 0.1…999.9 seconds		
	Accuracy	0.25% ± 1 digits for temperature sensors 0.1% ±1 digits (for mV and mA)		Between 100 and 240V~error is minimal
	Resistance thermometer (for ΔT: R1+R2 must be <320Ω)	Pt100Ω at 0°C (IEC 751) °C/°F selectable	2 or 3 wires connection Burnout (with any combination)	Max. wire Res.: 20 Ω max. (3 wires) Sensitivity: 0.1°C/10°C E. T. <0.1°C/10 Ω Wire Res.
	Thermocouple	L,J,T,K,S,R,B,N,E, W3,W5 (IEC 584) Rj >10MΩ °C/°F selectable	Internal cold junction compensation with NTC Error 1°C/20°C ± 0.5°C Burnout	Line: 150Ω max. Input drift: <2µV/°C Env. Temp. <5µV/10Ω Wire Res.
	DC input (current)	4-20mA, 0-20mA Rj >30Ω	Burnout. Engineering units, conf. decimal point, position with or without √‾ I. Sc.: -999…9,999 F. Sc.: -999…9,999 (min. range of 100 digit)	Input drift: <0.1% / 20°C Env. Temp. <5µV/10Ω Wire Res.
	DC input (voltage)	0-50mV, 0-300mV Rj >10MΩ		
		1-5, 0-5, 0-10V Rj >10kΩ		
	Frequency (option) 0-2.000 / 0-20.000Hz	Low level ≤2V High level 4-24V		
Auxiliary inputs	RemoteSetpoint not isolated accuracy 0.1%	Current 0/4-20mA Rj = 30Ω Voltage 1-5, 0-5, 0-10V Rj = 300kΩ	Bias in engineering units and ±range Ratio from -9.99…+99.99 Local + Remote Setpoint	
	Potentiometer	from 100Ω to 10kΩ	Feedback valve position	
Digital inputs 3 logic	The closure of the external contact produces any of the following actions:	Auto/Man mode change, Local/Remote Setpoint mode change, 3 Stored Setpoint activation, keyboard lock, measure hold, slope inhibit and output forcing		
		Program Run/Hold and selection (if option installed)		
Operating mode and Outputs	1 single or double action PID loop or On/Off with 1, 2, 3 or 4 alarms			
Control mode	Algorithm	PID with overshoot control or On/Off, valve drive PID algorithm to control motorised positioners		
	Proport. band (P)	0.5…999.9%		Single action PID algorithm
	Integral time (I)	1…9,999 s	enabled disabled	
	Derivative time (D)	0.1…999.9 s		
	Error dead band	0.1…10.0 digit		
	Overshoot control	0.01…1.00		
	Manual reset	0…100%		
	Cycle time (Time poportional only)	0.2…100.0 s		
	Min./Max output limits	0…100% separately adjustable		
	Control output rate limit	0.01…99.99%/s	enabled disabled	
	Soft-start output value	1…100% time 1…9,999 s		
	Output safety value	-100…100%		
	Control output forcing value	-100…100%		
	Control output hysteresis	0…5% Span in engineering units		On/Off algorithm
	Dead band	0.0…5.0%		Double action PID algorithm (Heat/Cool)
	Cool proportional band (P)	0.5…999.9%		
	Cool integral time (I)	1…9,999 s	enabled disabled	
	Cool derivative time (D)	0.1…9,999 s		
	Cool cycle time (Time proportional only)	0.2…100.0 s		
	Cool control output high limit	0…100%		
	Cool output max. rate	0.01…99.99/s		


Input type	Scale range
RTD Pt100 IEC751	-99.9…300.0 °C -99.9…572.0 °F
	-200…600 °C -328…1112 °F
RTD 2xPt100 IEC751 per ΔT	-50.0…50.0 °C -58.0…122.0 °F
TC L Fe-Const DIN43710	0…600 °C 32…1,112 °F
TC J Fe-CU45% NI IEC584	0…600 °C 32…1,112 °F
TC T Cu-CuNi IEC584	-200…400 °C -328…752 °F
TC K Chromel-Alumel IEC584	0…1,200 °C 32…2,192 °F
TC S Pt10% Rh Pt IEC584	0…1,600 °C 32…2,912 °F
TC R Pt13% Rh Pt IEC584	0…1,600 °C 32…2,912 °F
TC B Pt30% Rh Pt 6% IEC584	0…1,800 °C 32…3,272 °F
TC N Nicrosil-Nisil IEC584	0…1,200 °C 32…2,192 °F
TC E Ni10% CR CuNi IEC584	0…600 °C 32…1,112 °F
TC NI-NiMo18%	0…1,100 °C 32…2,012 °F
TC D W3%Re 25%Re IEC584	0…2,000 °C 32…3,632 °F
TC C W5%Re W26%Re IEC584	0…2,000 °C 32…3,632 °F
0/4…20 mA 0…50/300 mV 0/1…5 V 0…10 V	Configurable engineering units mA, mV, V, bar, psi, Rh, ph
Custom scale	On request
Frequency (option)	0...2kHz or 0...20kHz

Table 1: PV input


Technical data

Features (at 25°C T. env.amb.)	Description				
Control mode	Motor travel time	15…600 s	Valve drive PID algorithm		
	Motor minimum step	to 0.1…5.0%			
	Feedback potentiometer	100Ω…10kΩ			
OP1-OP2 outputs	SPST relay N.O., 2A/250V~ for resistive load Triac, 1A/250V~ for resistive load				
OP3 output	SPDT relay N.O., 2A/250V~ for resistive load				
OP4 output	SPST relay N.O., 2A/250V~ for resistive load				
Analogue / digital OP5 and OP6 (option) outputs	Control retransmission of PV/SP	Galvanic isolation: 500V~ /1 min. Short circuit protected Resolution 12 bit Accuracy: 0.1%	Analogue: 0/1...5V, 0...10V, 500Ω / 20mA max. 0/4…20mA, 750Ω /15V max. Digital: 0/24V- ±10% - 30mA max. for solid state relay		
AL1- AL2 - AL3 AL4 alarms	Hysteresis 0…5% Span in engineering units				
	Action	Active high	Action type	Deviation threshold	±range
		Active low		Band threshold	0…range
				Absolute threshold	whole range
		Special functions	Sensor break, heater break alarm		
			Acknowledge (latching), activation inhibit (blocking)		
			OP3, OP4 connected to Timer or Program (if option installed)		
Setpoint	Local + 3 stored	Up and down ramps 0.1…999.9 digit/min or digit/h (OFF=0) Low limit: from low range to high limit High limit: from low limit to high range Remote Setpoint not available with frequency input			
	Remote only				
	Local and Remote				
	Local with trim				
	Remote with trim				
	Programmable	If option installed			
Programmable Setpoint (optional)	4 programs, 16 segments (1 initial and 1 end) From 1 to 9999 cycles or continuous cycling (OFF)				
	Time values in seconds, minutes and hours Start, stop, hold, etc. activated from the keypad, digital input and serial line				
Tuning	Fuzzy-Tuning type. The controller selects automatically the best method according to the process conditions	Step response Natural frequency			
	Adaptive Tune self-learning, not intrusive, analysis of the process response to perturbations and continuous calculation of the PID parameters				
Auto/Man selection	Standard with bumpless function, by keypad, digital or serial communications				
Serial comm.s (option)	RS 485 isolated, SLAVE Modbus/Jbus protocol, 1,200, 2,400, 4,800, 9,600, 19,200 bit/s 3 wires. RS 485 isolated, MASTER Modbus/Jbus protocol, 1,200, 2,400, 4,800, 9,600, 19,200 bit/s 3 wires. RS485 asynchronous / isolated, PROFIBUS DP protocol, from 9,600 bit/s at 12MB/s selectable, max. lenght 100 m (at 12 Mb/s).				
Auxiliary supply	+24– ± 20% 30mA max. - for external transmitter supply				
Operation alarm safety	Measure input	Detection of out of range, short circuit or sensor break with automatic activation of the safety strategies and alerts on display			
	Control output	Safety and forcing value separately adjustable: -100%…100%			
	Parameters	Parameter and configuration data are stored in a non volatile memory for an unlimited time			
	Access protection	Password to access the configuration and parameters data Fast view			
General characteristics	Power supply (fuse protected)	100-240~ (-15% + 10%) 50/60Hz or 24~ (-15% + 25%) 50/60Hz and 24V– (continuous) (-15% + 25%)	Power consumption 5W max.		
	Safety	Compliance to EN61010-1 (IEC1010-1), installation class 2 (2,500V) pollution class 2, instrument class II			
	Electromagnetic compatibility	Compliance to the CE standards			
	UL and cUL Approval	File E176452			
	Protection EN60529 (IEC529)	IP65 front panel			
	Dimensions	1/4 DIN - 96 x 96, depth 110 mm, weight 500 g approx.			


Electrical wirings

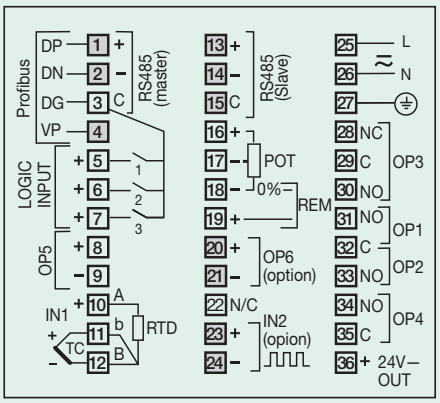


Dimensions

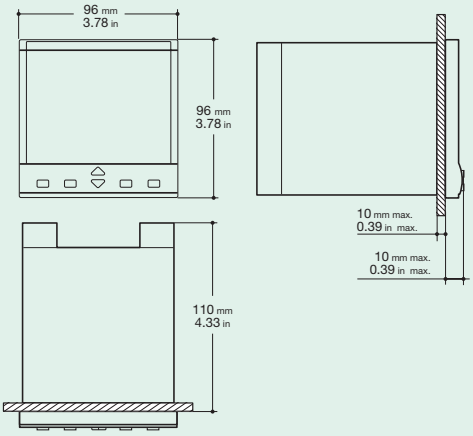

Panel cut-out

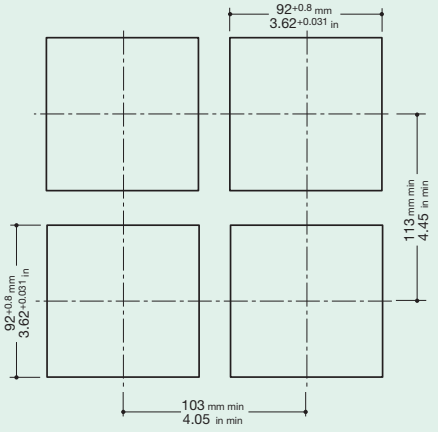

Ordering codes

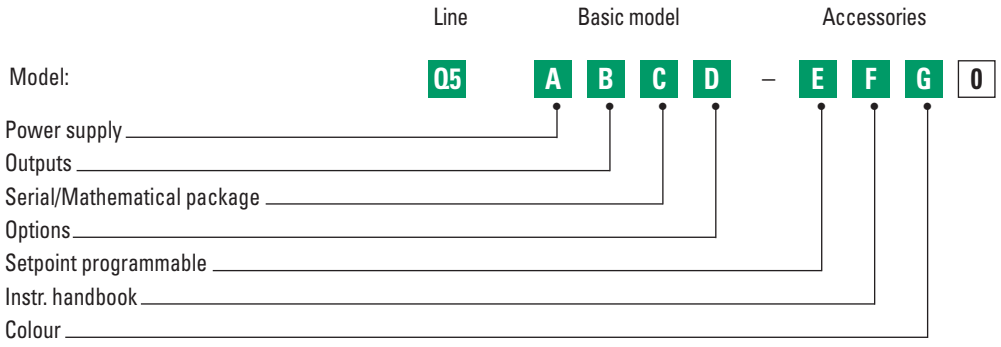

Power supply	A
100-240V~ (-15% +10%)	3
24V~ (-25% +12%) or 24V– (-15% +25%)	5

OP1-OP2 outputs	B
Relay-Relay	1
Triac-Triac	5

Serial communications/Mathematical package	C
Not fitted	0
Mathematical package	1
RS 485 Modbus/Jbus SLAVE + Mathematical package	5
RS 485 Modbus/Jbus SLAVE+MASTER + Mathematical package	6
PROFIBUS DP SLAVE + Mathematical package	7
RS 485 Modbus/Jbus SLAVE+PROFIBUS DP SLAVE + Mathematical package	8

Options	D
None	0
Frequency input (Remote Setpoint not available)	1
Second analogue/digital output (OP6)	4
Frequency input + second analogue output (OP6) (Remote Setpoint not available)	6

Setpoint programmer	E
Not fitted	0
Four “16 segments” programs	4

Instruction handbook	F
Italian-English (std)	0
French-English	1
German-English	2
Spanish-English	3

Front case colour	G
Dark (std)	0
Beige	1

If not differently specified the controller will be supplied with standard version
Model: Q5 3100-0000

S E R I E S

ASCON spa
20021 Bollate
(Milano) Italy
Via Falzarego, 9/11
Tel. +39 02 333 371
Fax +39 02 350 4243
http://www.ascon.it
e-mail info@ascon.it

ASCON FRANCE
2 bis, Rue Paul Henri Spaak
ST. THIBAULT DES VIGNES
F-77462 LAGNY SUR
MARNE - Cedex
Tél. +33 (0) 1 64 30 62 62
Fax +33 (0) 1 64 30 84 98
e-mail
ascon.france@wanadoo.fr

AGENCE SUD-EST
Tél. +33 (0) 4 74 27 82 81
Fax +33 (0) 4 74 27 81 71

WORLDWIDE NETWORK OF DIRECT SALES CENTRES, DISTRIBUTORS AND VARs

Europe
Belgium, Cyprus, Croatia, Czech Rep, Finland, France, Germany, Great Britain, Greece, Holland, Ireland, Norway, Poland, Portugal, Romania, Russia, Slovenia, Spain, Sweden, Switzerland, Turkey, Ukrain

Americas
Argentina, Brazil, Canada, Chile, Colombia, Ecuador, Peru, United States

Over the world
Australia, China, Egypt, Hong Kong, India, Iran, Israel, Malaysia, New Zealand, Pakistan, Saudi Arabia, Singapore, Taiwan, Thailand, South Africa & South East Africa

